

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

LEGEND 圖例

A/C PLATFORM	= Air-Conditioning Platform	冷氣機平台
A/C PLATFORM ABOVE	= Air-Conditioning Platform Above	冷氣機平台置上
A.F.	= Architectural Feature	建築裝飾
BAL.	= Balcony	露台
BAL. ABOVE	= Balcony Above	露台置上
BATH.	= Bathroom	浴室
BR.	= Bedroom	睡房
BUILDING LINE ABOVE	=	建築物置上
CABLE TRENCH FOR FUEL PIPE	=	燃料管道槽
CAT LADDER	=	豎梯
COMMON ROOF	=	公用天台
DOG HOUSE	=	室外管道房
DN	= Down	落
EAD	= Exhaust Air Duct	排風管槽
E.M.R.	= Electrical Meter Room	電錶房
ELV.	= Extra-Low Voltage Duct	特低壓電線槽
ELV. ROOM	= Extra-Low Voltage Room	特低壓房
EL. D.	= Electrical Cable Duct	電力管槽
EXHAUST FAN ROOM (RSMRR)	= Exhaust Fan Room (Refuse Storage and Material Recovery Room)	排風機房 (垃圾及物料回收室)
F1/F2	= Fireman's Lift 1/Fireman's Lift 2	消防升降機1/消防升降機2
FENCE WALL	=	圍牆
FLAT ROOF	=	平台
FLAT ROOF (COMMON AREA)	=	平台（公用地方）
FLUSHING/POTABLE WATER PUMP & TANK ROOM	=	沖廁／食水泵及水缸房
F.S. LIFT LOBBY	= Fireman's Lift Lobby	消防升降機大堂
FH	= Fire Hydrant	消防栓
H.R.	= Hose Reel	消防喉轆
KIT.	= Kitchen	廚房
LIFT	=	升降機

LIFT SHAFT	=	升降機井道
LIFT LOBBY	=	升降機大堂
LIV./DIN.	= Living Room/Dining Room	客廳／飯廳
M.BATH.	= Master Bathroom	主人浴室
M.B.R.	= Master Bedroom	主人睡房
OPEN KIT.	= Open Kitchen	開放式廚房
P.D.	= Pipe Duct	管道槽
REFUGE ROOF	=	避火天台
PLINTH FOR A/C	= Plinth for Air-Conditioning Unit	冷氣機底座
ROOF	=	天台
ROOF (COMMON AREA)	=	天台（公用地方）
R.S. & M.R.R.	= Refuse Storage and Material Recovery Room	垃圾及物料回收室
SELF-CLOSING DOOR	= Self-closing Door (Noise Mitigation Measures)	自動關閉門（噪音緩解措施）
SINK	=	洗滌盆
ST.	= Store Room	儲物室
T.D.	= Telephone Duct	電話管槽
TOP OF BAL.	= Top of Balcony Below	下層露台頂
TOP OF U.P.	= Top of Utility Platform Below	下層工作平台頂
TOP OF E.M.R. BELOW	= Top of Electrical Meter Room Below	下層電錶房頂
TOWER 2	=	第2座
TOWER 3	=	第3座
T2	= Tower 2	第2座
T3	= Tower 3	第3座
T.	= Toilet	廁所
UP	=	上
U.P.	= Utility Platform	工作平台
U.P. ABOVE	= Utility Platform Above	工作平台置上
UTIL.	= Utility Room	多用途房
W.M.C.	= Water Meter Cabinet	水錶櫃

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

Notes:

1. There may be architectural features on external walls of some floors.
2. Common pipes exposed and/or enclosed in cladding are located at/adjacent to balcony and/or private flat roof and/or private roof and/or utility platform and/or air-conditioner platform and/or external wall of some residential properties.
3. There are sunken slabs and/or ceiling bulkheads and/or false ceiling at living and dining rooms, bedrooms, utility rooms, corridors, bathrooms, store rooms, lavatories, open kitchens and kitchens of some residential properties for the air-conditioning system and/or mechanical and electrical services. There are exposed pipes or ductings for air-conditioning system and/or mechanical and electrical services within some utility rooms.
4. The internal ceiling height within some residential properties may vary due to structural, architectural and/or decoration design variations.
5. Balconies and utility platforms are non-enclosed areas.
6. Symbols of fittings and fitments shown on the floor plans, such as bathtubs, sink, water closets, shower cubicle, sink counter etc., are architectural symbols extracted from the latest approved general building plans and are for general indication only.
7. There are non-structural prefabricated external walls and curtain walls forming part of the enclosing walls of the residential properties. The saleable area of a residential property has included the areas of the non-structural prefabricated external walls and curtain walls, and is measured from the exterior of such non-structural prefabricated external walls and curtain walls.


附註：

1. 部分樓層外牆範圍或設有建築裝飾。
2. 部分住宅物業的露台及/或私人平台及/或私人天台及/或工作平台及/或空調機平台及/或外牆或其鄰近地方設有外露及/或藏於外牆飾板內之公用喉管。
3. 部分住宅物業的客飯廳、睡房、多用途房、走廊、浴室、儲物房、洗手間、開放式廚房及廚房設有跌級樓板及/或假陣及/或假天花，用以裝置空調系統及/或機電設備。部分多用途房內設有空調系統及/或機電設備之外露喉管或管道槽。
4. 部分住宅物業之室內天花高度將會因應結構、建築及/或裝修設計上的需要而有差異。
5. 露台及工作平台為不可封閉的地方。
6. 樓面平面圖上所顯示的形象裝置符號，例如浴缸、洗滌盆、坐廁、淋浴間、洗滌盆櫃等乃摘自最新的經批准的建築圖則的建築圖示，只作一般性標誌。
7. 住宅物業有構成圍封牆的一部分的非結構的預製外牆及幕牆。住宅物業之實用面積已包括非結構的預製外牆及幕牆的面積，並由該非結構的預製外牆及幕牆的外部開始量度。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

TOWER 2
3/F FLOOR PLAN
第2座
3樓平面圖

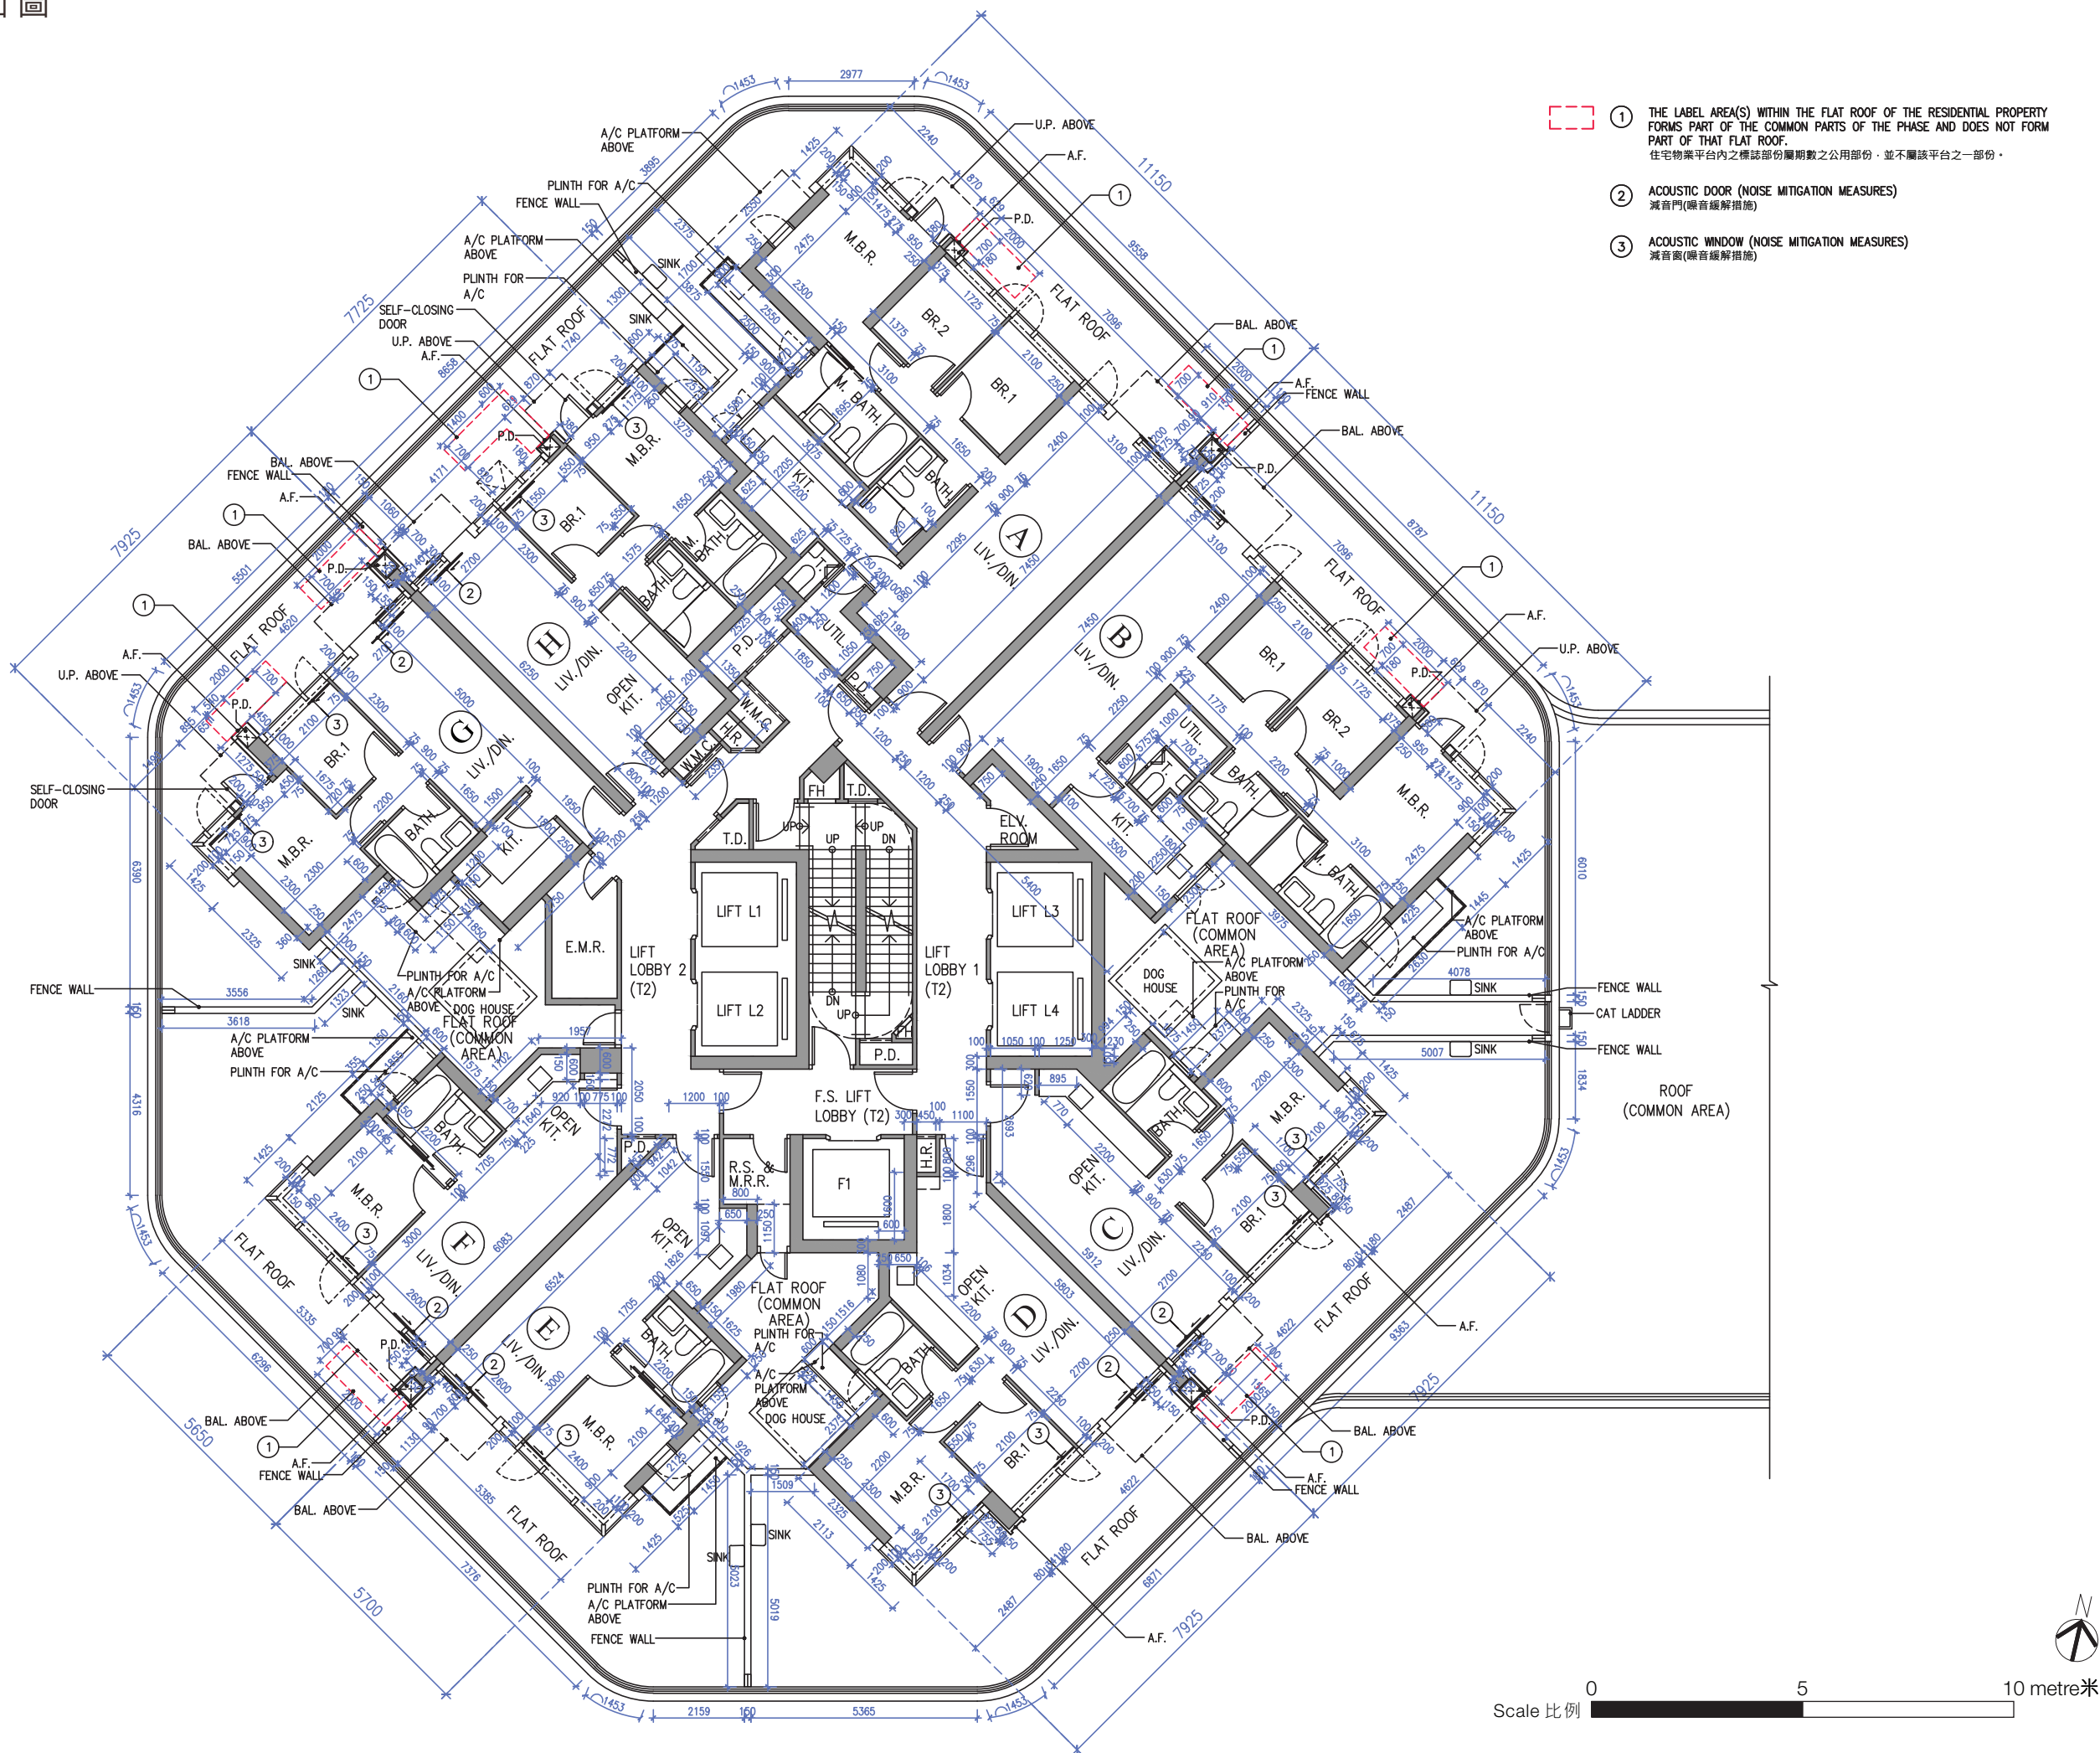

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

	TOWER 座	FLOOR 樓層	UNIT單位							
			A	B	C	D	E	F	G	H
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	Tower 2 第2座	3/F 3樓	150, 200	150	150	150	150	150	150	150
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）（毫米）			2680, 2705, 3080, 3105, 3130, 3180, 3430, 3480	3080, 3130, 3180, 3430, 3480	3080, 3180, 3480	3080, 3180, 3480	3080, 3180, 3480	3080, 3180, 3480	3080, 3180, 3480	3080, 3130, 3430, 3480

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (This does not apply to the residential properties in the Phase because the design of the Phase does not involve reducing thickness of structural walls of residential properties on the upper floors.)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用於期數內的住宅物業，因期數的設計並不牽涉住宅物業的較高樓層的結構牆的厚度遞減。）

Notes:

1. The dimensions in the floor plan are all structural dimensions in millimetre.

2. Please refer to Page 20 of this sales brochure for glossary of the terms and abbreviations shown in the floor plan.

3. 4/F, 14/F, 24/F and 34/F are omitted in Tower 2.

附註：

1. 平面圖所列之尺寸為以毫米標示之建築結構尺寸。

2. 樓面平面圖中顯示之名詞及簡稱請參閱本售樓說明書第20頁。

3. 第2座不設4樓、14樓、24樓及34樓。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

TOWER 2
5/F – 13/F, 15/F – 23/F,
25/F – 33/F & 35/F – 36/F
FLOOR PLAN

第2座
5樓至13樓、15樓至23樓、
25樓至33樓及35樓至36樓
平面圖



FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

	TOWER 座	FLOOR 樓層	UNIT 單位							
			A	B	C	D	E	F	G	H
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	Tower 2 第2座	5/F – 13/F, 15/F – 23/F, 25/F – 33/F & 35/F – 36/F 5樓至13樓、 15樓至23樓、 25樓至33樓 及35樓至36樓	150, 200	150	150	150	150	150	150	150
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）（毫米）			3080	3080	3080	3080	3080	3080	3080	3080

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (This does not apply to the residential properties in the Phase because the design of the Phase does not involve reducing thickness of structural walls of residential properties on the upper floors.)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用於期數內的住宅物業，因期數的設計並不牽涉住宅物業的較高樓層的結構牆的厚度遞減。）

Notes:

1. The dimensions in the floor plan are all structural dimensions in millimetre.

2. Please refer to Page 20 of this sales brochure for glossary of the terms and abbreviations shown in the floor plan.

3. 4/F, 14/F, 24/F and 34/F are omitted in Tower 2.

附註：

1. 平面圖所列之尺寸為以毫米標示之建築結構尺寸。


2. 樓面平面圖中顯示之名詞及簡稱請參閱本售樓說明書第20頁。

3. 第2座不設4樓、14樓、24樓及34樓。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

TOWER 2
37/F – 41/F FLOOR PLAN
第2座
37樓至41樓平面圖

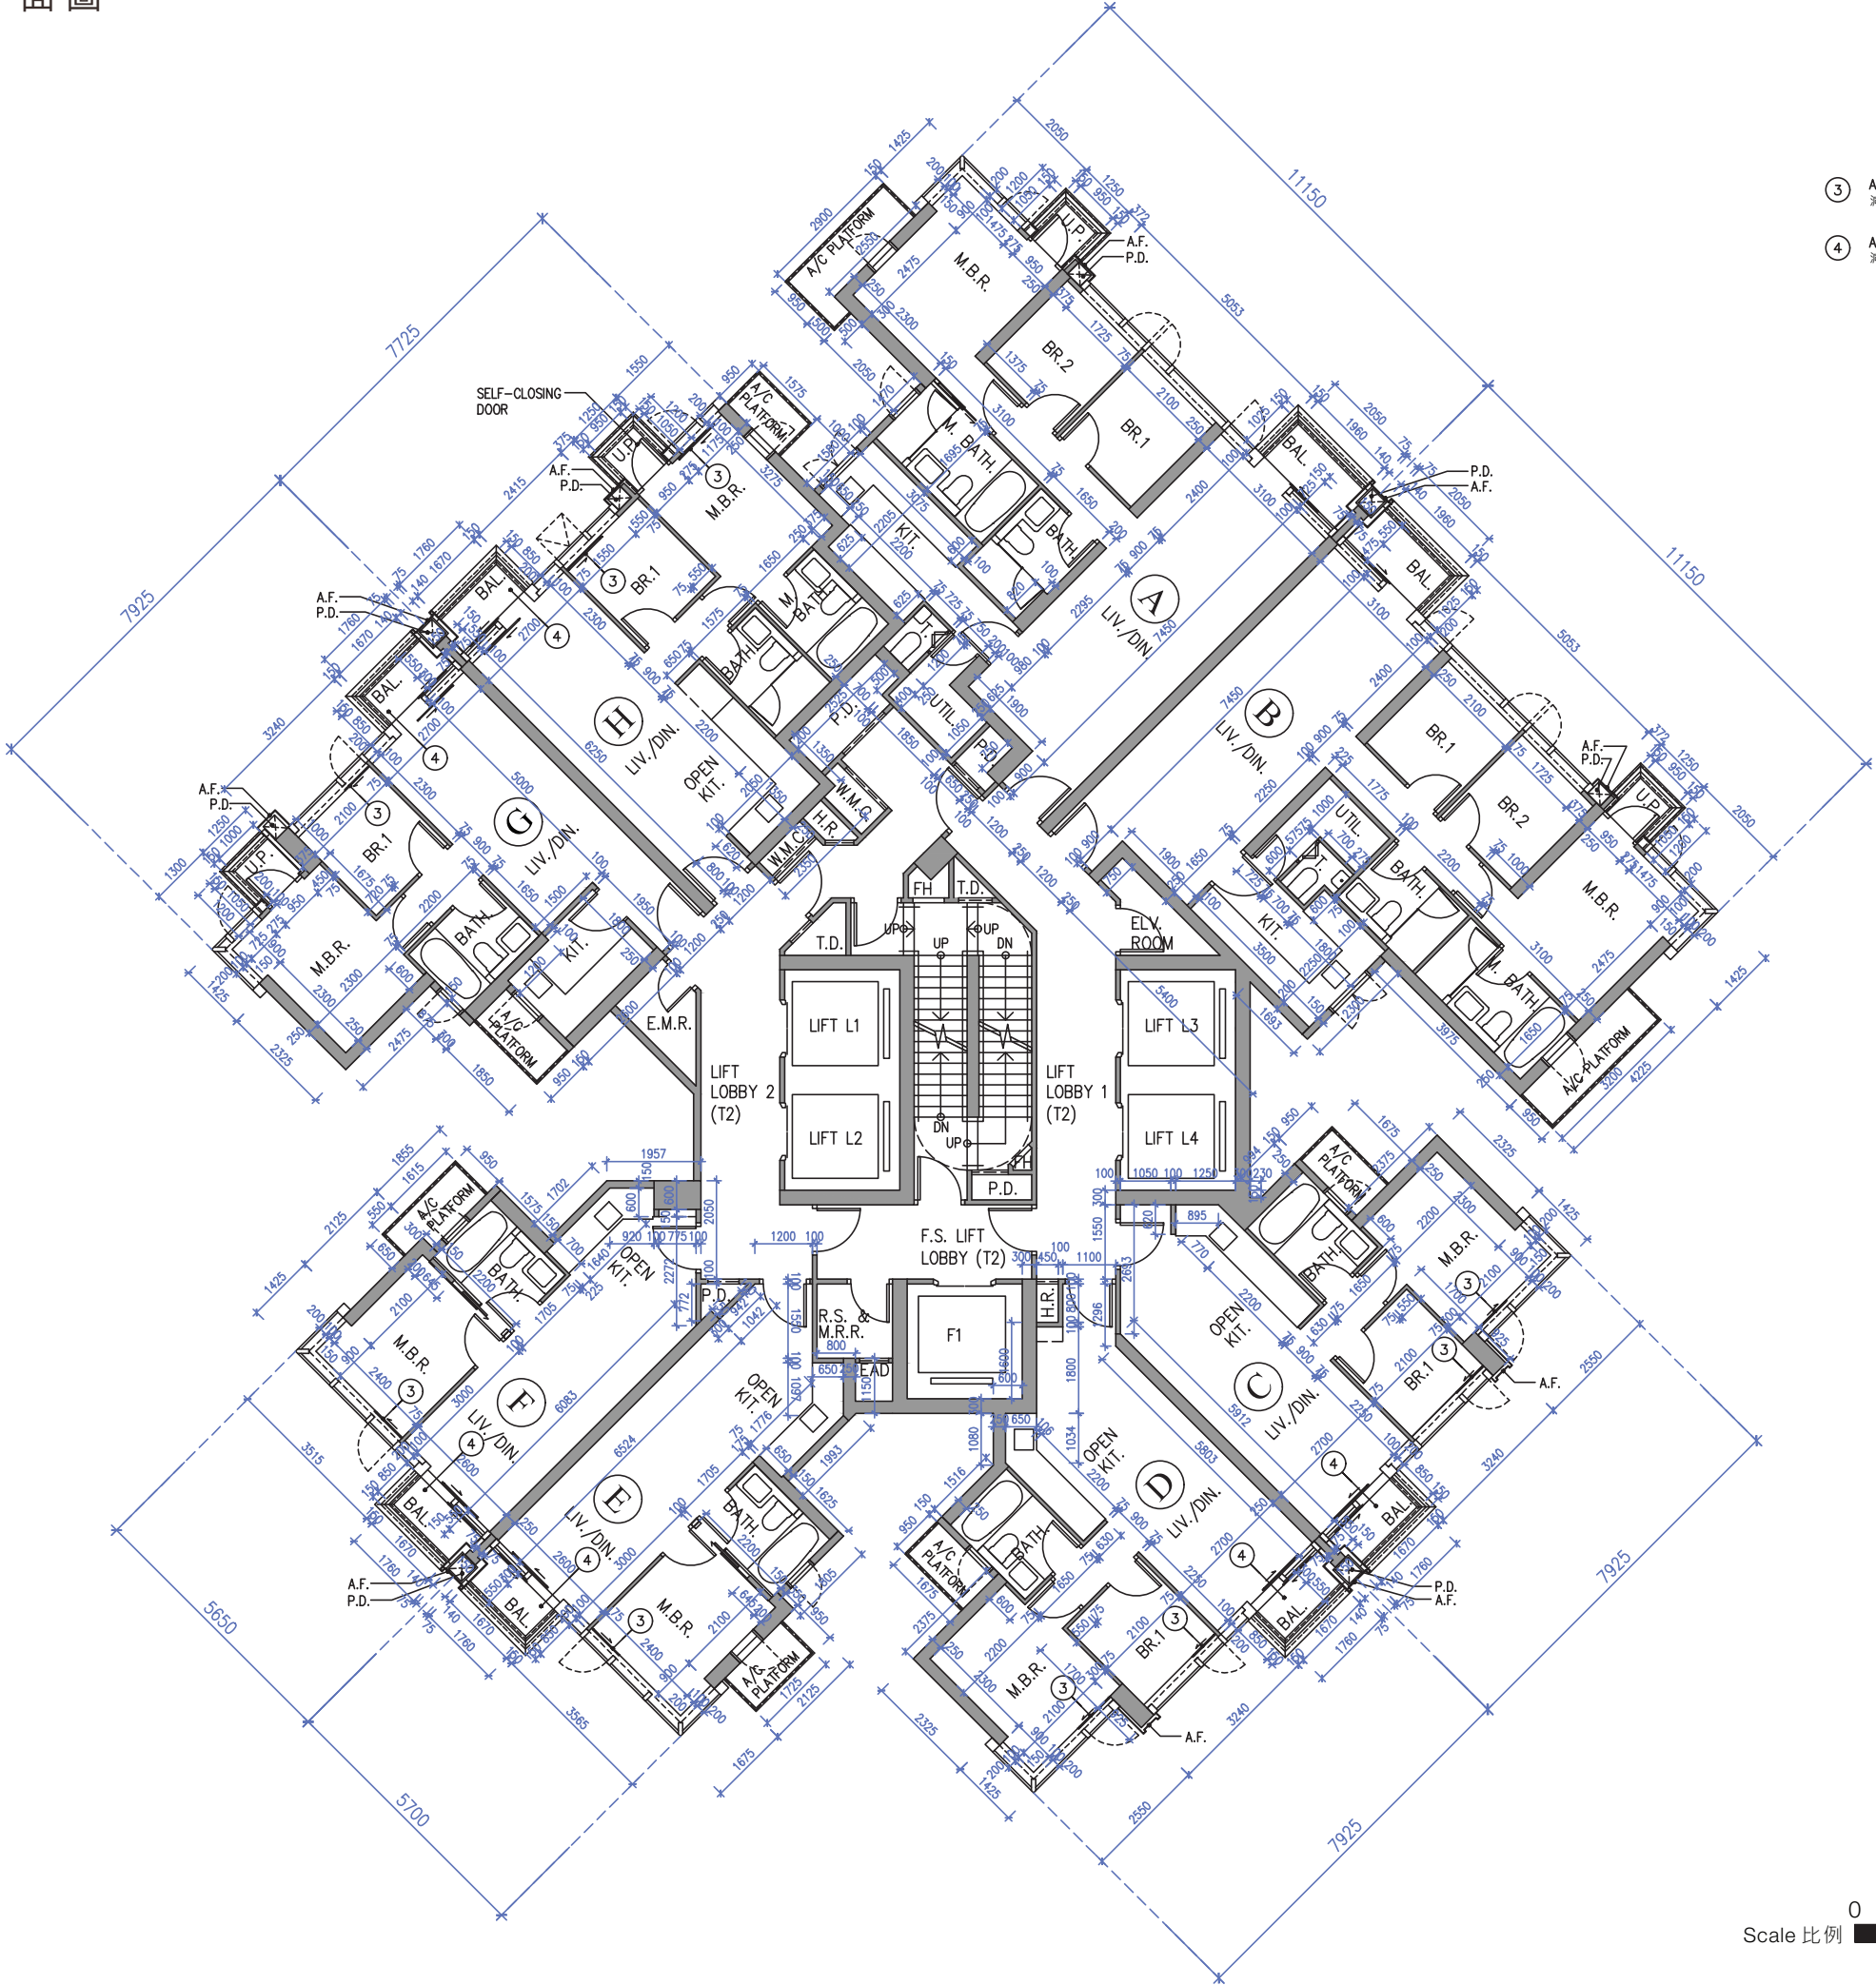

- ③ ACOUSTIC WINDOW (NOISE MITIGATION MEASURES)
減音窗(噪音緩解措施)
- ④ ACOUSTIC BALCONY (NOISE MITIGATION MEASURES)
減音露台(噪音緩解措施)

Scale 比例 0 5 10 metre 米

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

	TOWER 座	FLOOR 樓層	UNIT單位							
			A	B	C	D	E	F	G	H
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	Tower 2 第2座	37/F – 40/F 37樓至40樓	150, 200	150	150	150	150	150	150	150
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）（毫米）			3080	3080	3080	3080	3080	3080	3080	3080
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）		41/F 41樓	150, 200	150	150	150	150	150	150	150
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）（毫米）			3500, 3875, 3900	3500	3500	3500	3500	3500	3500	3500

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (This does not apply to the residential properties in the Phase because the design of the Phase does not involve reducing thickness of structural walls of residential properties on the upper floors.)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用於期數內的住宅物業，因期數的設計並不牽涉住宅物業的較高樓層的結構牆的厚度遞減。）

Notes:

1. The dimensions in the floor plan are all structural dimensions in millimetre.

2. Please refer to Page 20 of this sales brochure for glossary of the terms and abbreviations shown in the floor plan.

3. 4/F, 14/F, 24/F and 34/F are omitted in Tower 2.

附註：

1. 平面圖所列之尺寸為以毫米標示之建築結構尺寸。


2. 樓面平面圖中顯示之名詞及簡稱請參閱本售樓說明書第20頁。

3. 第2座不設4樓、14樓、24樓及34樓。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

TOWER 2
42/F FLOOR PLAN
第2座
42樓平面圖

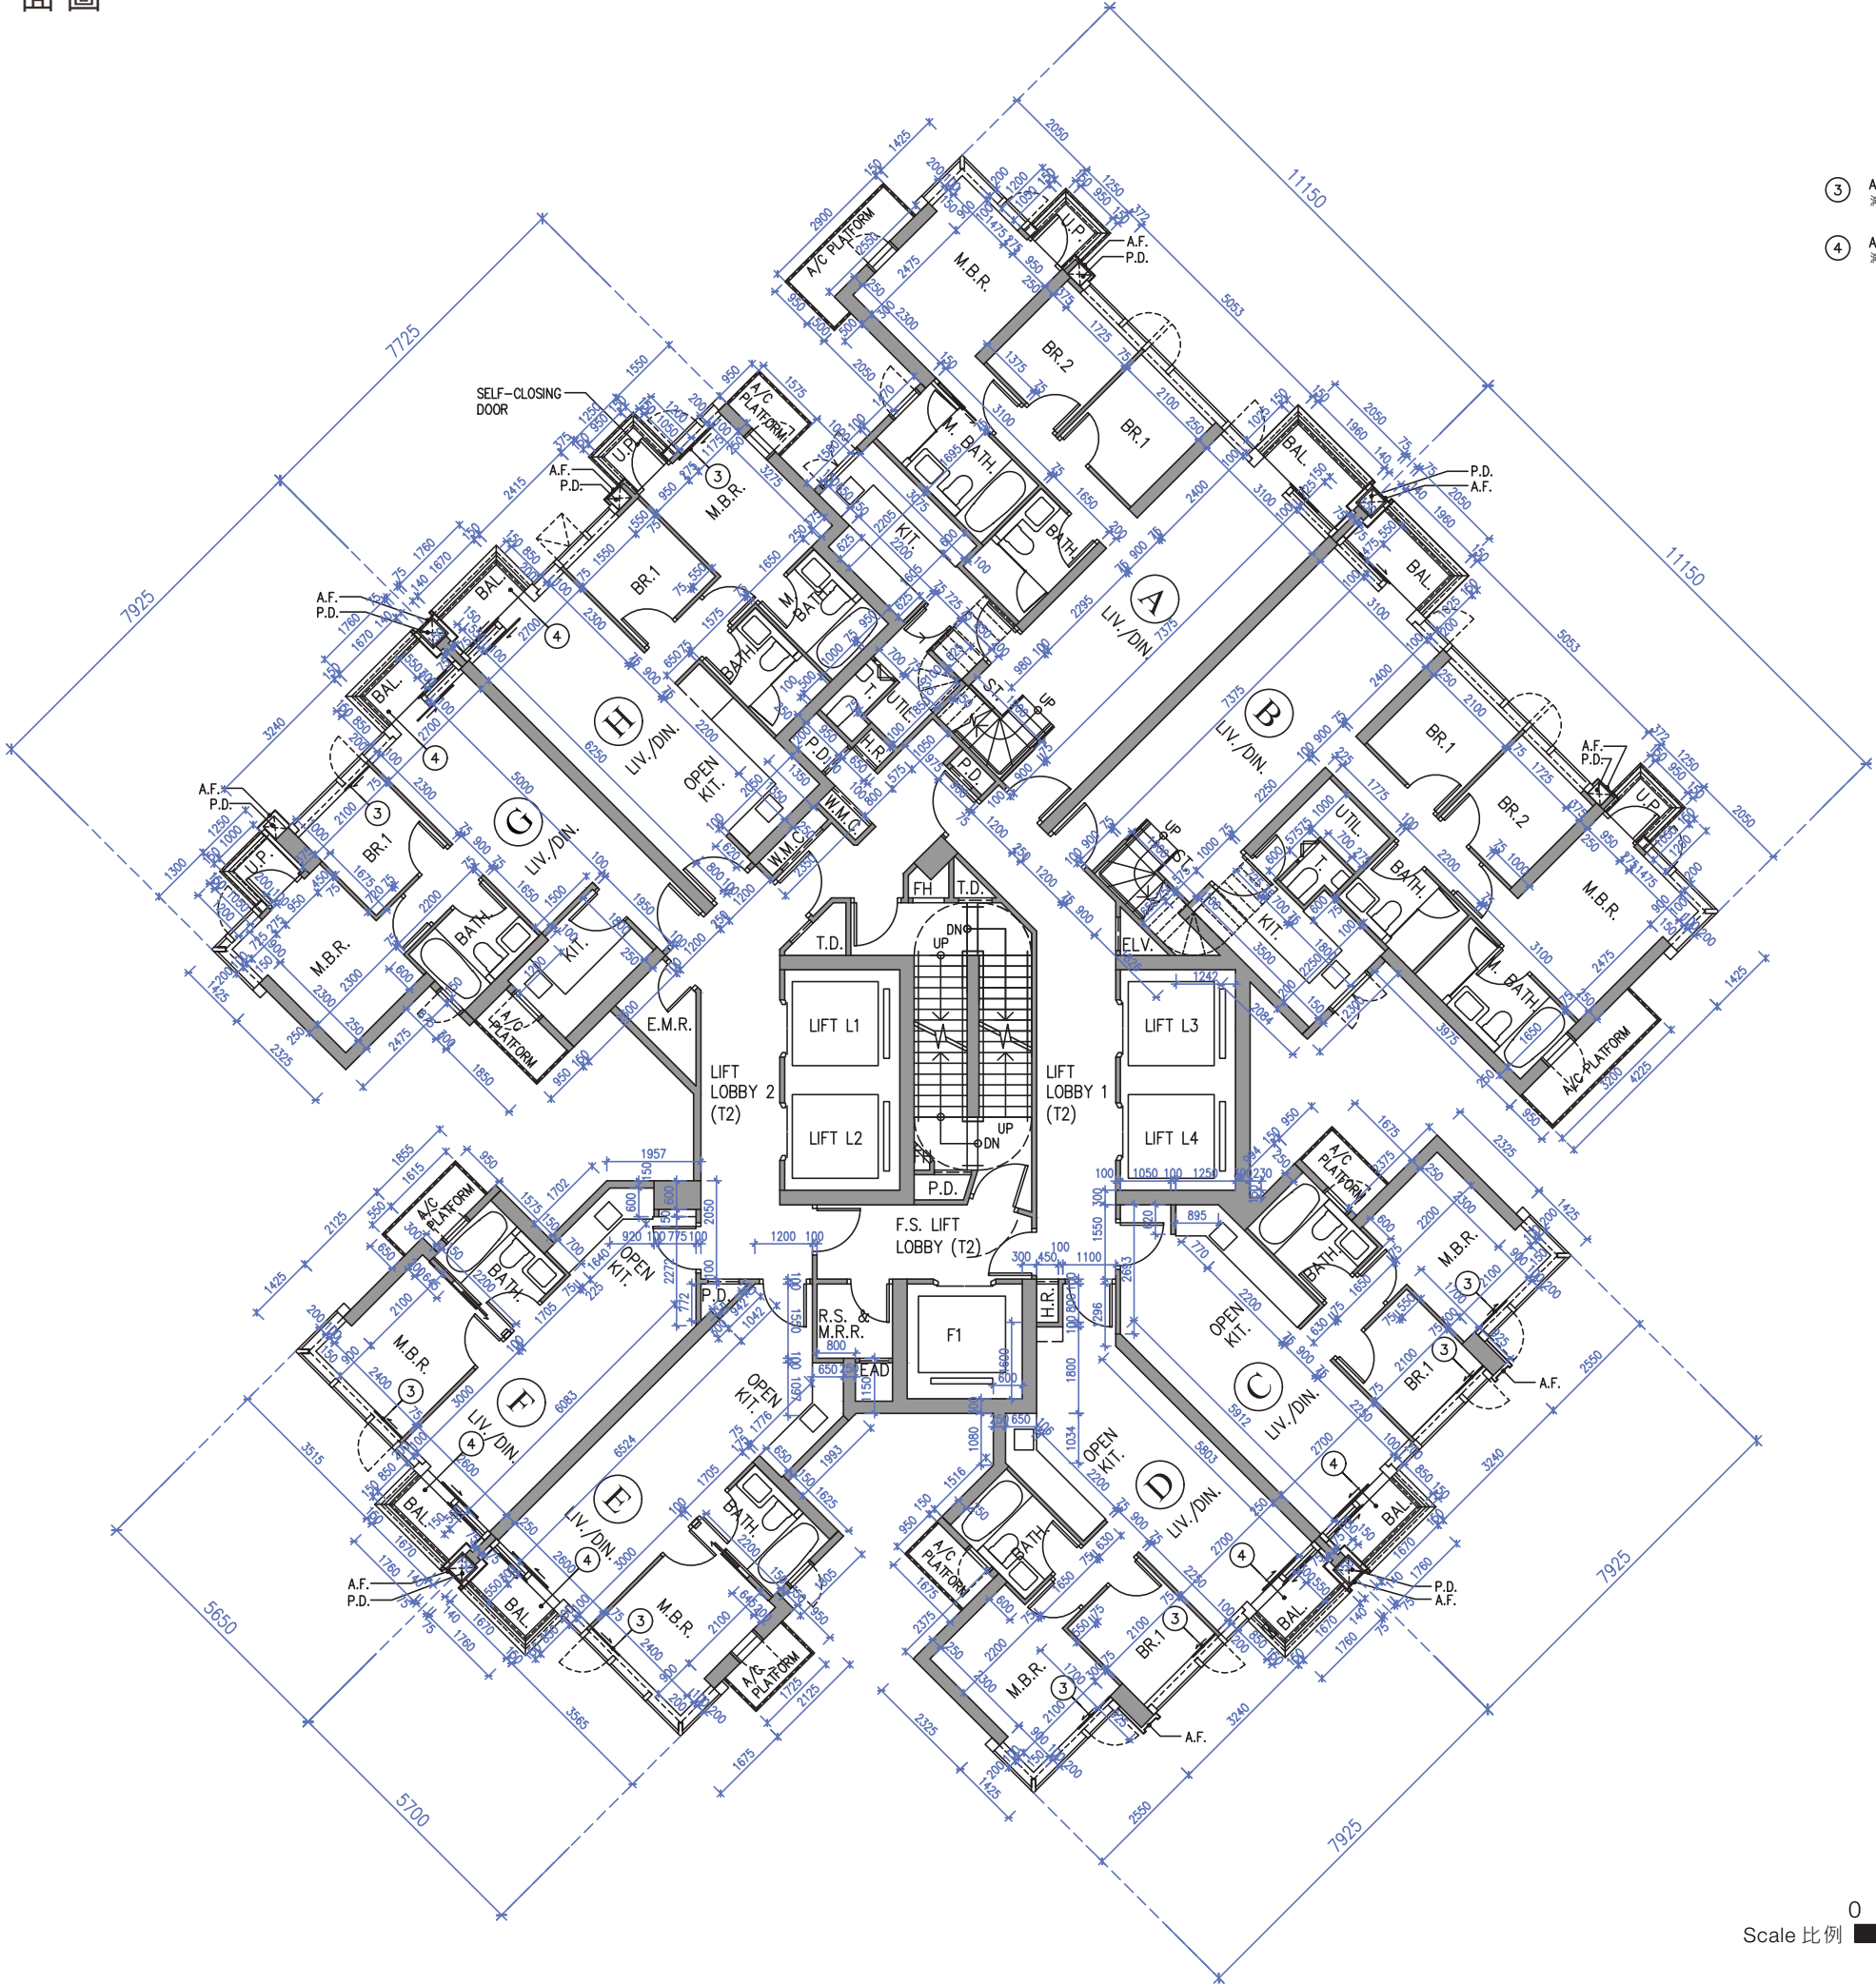

- ③ ACOUSTIC WINDOW (NOISE MITIGATION MEASURES)
減音窗(噪音緩解措施)
- ④ ACOUSTIC BALCONY (NOISE MITIGATION MEASURES)
減音露台(噪音緩解措施)

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

	TOWER 座	FLOOR 樓層	UNIT單位							
			A	B	C	D	E	F	G	H
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	Tower 2 第2座	42/F 42樓	150	150	150	150	150	150	150	150
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）（毫米）			3500, 3550, 3800, 3850, 3875	3500, 3550, 3800, 3850, 3900	3500, 3800, 3850	3500, 3800, 3850	3500, 3800, 3850	3500, 3800	3500, 3800, 3900	3500, 3550, 3850, 3900

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (This does not apply to the residential properties in the Phase because the design of the Phase does not involve reducing thickness of structural walls of residential properties on the upper floors.)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用於期數內的住宅物業，因期數的設計並不牽涉住宅物業的較高樓層的結構牆的厚度遞減。）

Notes:

1. The dimensions in the floor plan are all structural dimensions in millimetre.

2. Please refer to Page 20 of this sales brochure for glossary of the terms and abbreviations shown in the floor plan.

3. 4/F, 14/F, 24/F and 34/F are omitted in Tower 2.

附註：

1. 平面圖所列之尺寸為以毫米標示之建築結構尺寸。



2. 樓面平面圖中顯示之名詞及簡稱請參閱本售樓說明書第20頁。

3. 第2座不設4樓、14樓、24樓及34樓。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

TOWER 2
ROOF FLOOR PLAN
第2座
天台平面圖

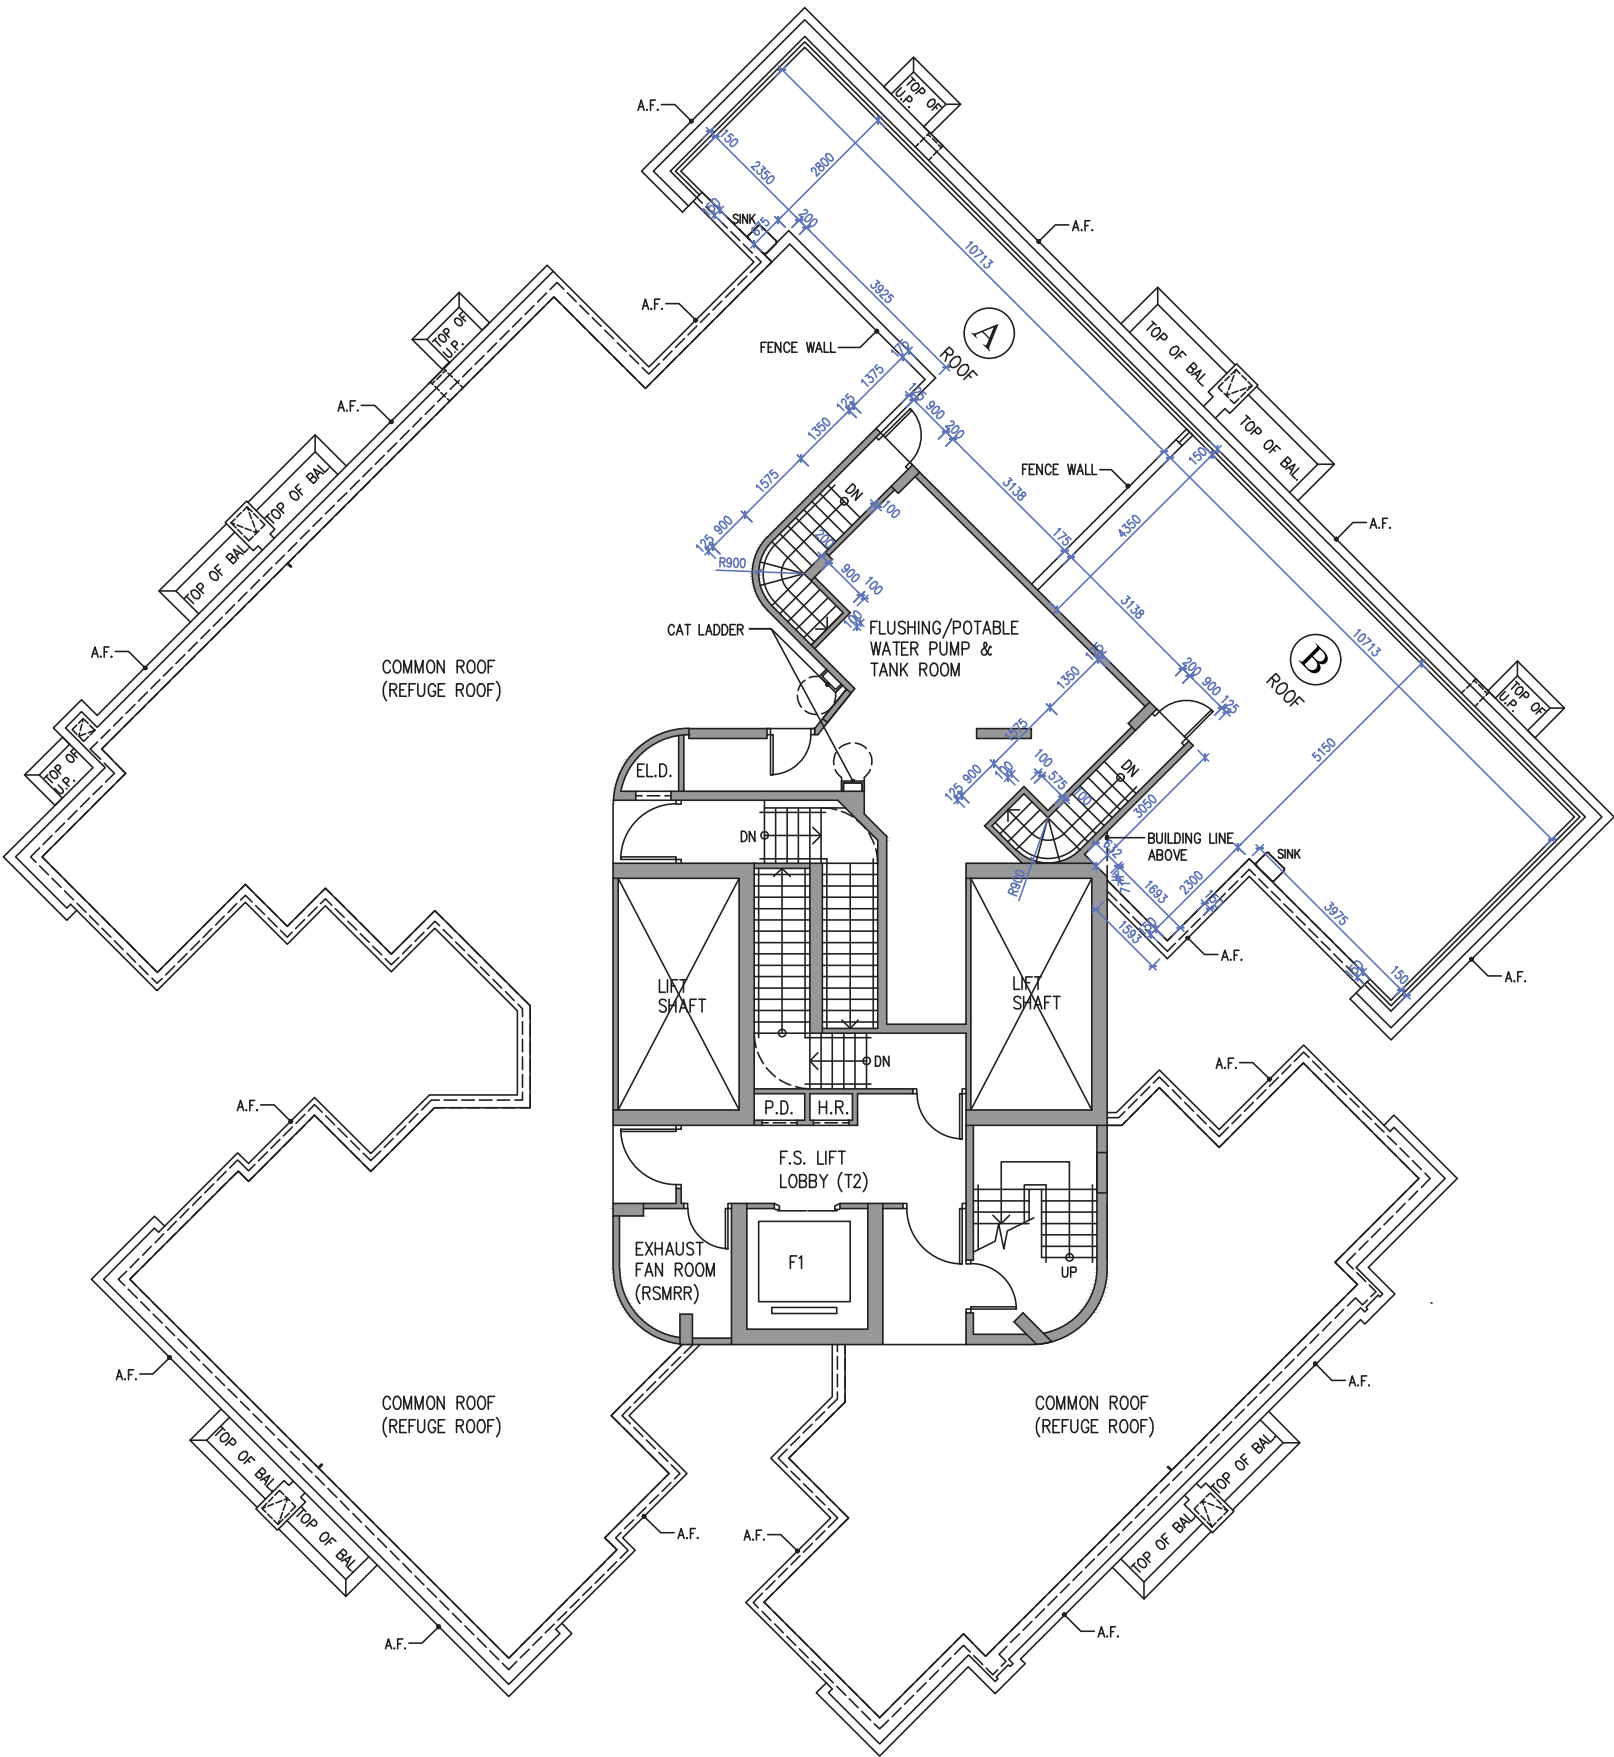

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

	TOWER 座	FLOOR 樓層	UNIT單位							
			A	B	C	D	E	F	G	H
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	Tower 2 第2座	Roof 天台	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）（毫米）			Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (This does not apply to the residential properties in the Phase because the design of the Phase does not involve reducing thickness of structural walls of residential properties on the upper floors.)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用於期數內的住宅物業，因期數的設計並不牽涉住宅物業的較高樓層的結構牆的厚度遞減。）

Notes:

1. The dimensions in the floor plan are all structural dimensions in millimetre.

2. Please refer to Page 20 of this sales brochure for glossary of the terms and abbreviations shown in the floor plan.

3. 4/F, 14/F, 24/F and 34/F are omitted in Tower 2.

附註：

1. 平面圖所列之尺寸為以毫米標示之建築結構尺寸。

2. 樓面平面圖中顯示之名詞及簡稱請參閱本售樓說明書第20頁。

3. 第2座不設4樓、14樓、24樓及34樓。

期數的住宅物業的樓面平面圖

第3座
3樓平面圖



FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

	TOWER 座	FLOOR 樓層	UNIT單位							
			A	B	C	D	E	F	G	H
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	Tower 3 第3座	3/F 3樓	150,200	150	150	150	150	150	150	150
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）（毫米）			2680, 2705, 3080, 3105, 3130, 3180, 3430, 3480	3080, 3130, 3180, 3430, 3480,	3080, 3180, 3480	3080, 3180, 3480	3080, 3180, 3480	3080, 3180, 3480	3080, 3180, 3480	3080, 3130, 3430, 3480,

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (This does not apply to the residential properties in the Phase because the design of the Phase does not involve reducing thickness of structural walls of residential properties on the upper floors.)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用於期數內的住宅物業，因期數的設計並不牽涉住宅物業的較高樓層的結構牆的厚度遞減。）

Notes:

1. The dimensions in the floor plan are all structural dimensions in millimetre.

2. Please refer to Page 20 of this sales brochure for glossary of the terms and abbreviations shown in the floor plan.

3. 4/F, 14/F, 24/F, 34/F and 44/F are omitted in Tower 3.

附註：

1. 平面圖所列之尺寸為以毫米標示之建築結構尺寸。

2. 樓面平面圖中顯示之名詞及簡稱請參閱本售樓說明書第20頁。

3. 第3座不設4樓、14樓、24樓、34樓及44樓。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

TOWER 3
5/F – 13/F, 15/F – 23/F,
25/F – 33/F & 35/F – 38/F
FLOOR PLAN

第3座
5樓至13樓、15樓至23樓、
25樓至33樓及35樓至38樓
平面圖



FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

	TOWER 座	FLOOR 樓層	UNIT 單位							
			A	B	C	D	E	F	G	H
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	Tower 3 第3座	5/F – 13/F, 15/F – 23/F, 25/F – 33/F & 35/F – 38/F 5樓至13樓、 15樓至23樓、 25樓至33樓 及35樓至38樓	150,200	150	150	150	150	150	150	150
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）（毫米）			3080	3080	3080	3080	3080	3080	3080	3080

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (This does not apply to the residential properties in the Phase because the design of the Phase does not involve reducing thickness of structural walls of residential properties on the upper floors.)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用於期數內的住宅物業，因期數的設計並不牽涉住宅物業的較高樓層的結構牆的厚度遞減。）

Notes:

1. The dimensions in the floor plan are all structural dimensions in millimetre.

2. Please refer to Page 20 of this sales brochure for glossary of the terms and abbreviations shown in the floor plan.

3. 4/F, 14/F, 24/F, 34/F and 44/F are omitted in Tower 3.

附註：

1. 平面圖所列之尺寸為以毫米標示之建築結構尺寸。

2. 樓面平面圖中顯示之名詞及簡稱請參閱本售樓說明書第20頁。

3. 第3座不設4樓、14樓、24樓、34樓及44樓。


FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

TOWER 3
39/F – 40/F FLOOR PLAN
第3座
39樓至40樓平面圖



- ③ ACOUSTIC WINDOW (NOISE MITIGATION MEASURES)
減音窗(噪音緩解措施)
- ④ ACOUSTIC BALCONY (NOISE MITIGATION MEASURES)
減音露台(噪音緩解措施)

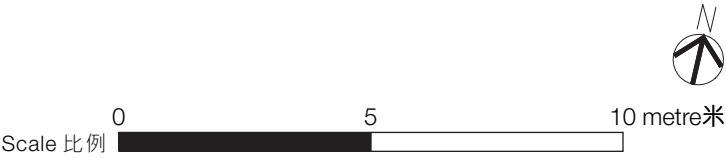

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

	TOWER 座	FLOOR 樓層	UNIT單位							
			A	B	C	D	E	F	G	H
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	Tower 3 第3座	39/F – 40/F 39樓至40樓	150,200	150	150	150	150	150	150	150
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）（毫米）			3080	3080	3080	3080	3080	3080	3080	3080

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (This does not apply to the residential properties in the Phase because the design of the Phase does not involve reducing thickness of structural walls of residential properties on the upper floors.)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用於期數內的住宅物業，因期數的設計並不牽涉住宅物業的較高樓層的結構牆的厚度遞減。）

Notes:

1. The dimensions in the floor plan are all structural dimensions in millimetre.

2. Please refer to Page 20 of this sales brochure for glossary of the terms and abbreviations shown in the floor plan.

3. 4/F, 14/F, 24/F, 34/F and 44/F are omitted in Tower 3.

附註：

1. 平面圖所列之尺寸為以毫米標示之建築結構尺寸。

2. 樓面平面圖中顯示之名詞及簡稱請參閱本售樓說明書第20頁。

3. 第3座不設4樓、14樓、24樓、34樓及44樓。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

TOWER 3
41/F – 42/F FLOOR PLAN
第3座
41樓至42樓平面圖



- ③ ACOUSTIC WINDOW (NOISE MITIGATION MEASURES)
減音窗(噪音緩解措施)
- ④ ACOUSTIC BALCONY (NOISE MITIGATION MEASURES)
減音露台(噪音緩解措施)

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

	TOWER 座	FLOOR 樓層	UNIT單位							
			A	B	C	D	E	F	G	H
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	Tower 3 第3座	41/F – 42/F 41樓至42樓	150,200	150	150	150	150	150	150	150
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）（毫米）			3080	3080	3080	3080	3080	3080	3080	3080

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (This does not apply to the residential properties in the Phase because the design of the Phase does not involve reducing thickness of structural walls of residential properties on the upper floors.)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用於期數內的住宅物業，因期數的設計並不牽涉住宅物業的較高樓層的結構牆的厚度遞減。）

Notes:

1. The dimensions in the floor plan are all structural dimensions in millimetre.

2. Please refer to Page 20 of this sales brochure for glossary of the terms and abbreviations shown in the floor plan.

3. 4/F, 14/F, 24/F, 34/F and 44/F are omitted in Tower 3.

附註：

1. 平面圖所列之尺寸為以毫米標示之建築結構尺寸。

2. 樓面平面圖中顯示之名詞及簡稱請參閱本售樓說明書第20頁。

3. 第3座不設4樓、14樓、24樓、34樓及44樓。


FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

TOWER 3
43/F FLOOR PLAN
第3座
43樓平面圖



- ③ ACOUSTIC WINDOW (NOISE MITIGATION MEASURES)
減音窗(噪音緩解措施)
- ④ ACOUSTIC BALCONY (NOISE MITIGATION MEASURES)
減音露台(噪音緩解措施)



FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

	TOWER 座	FLOOR 樓層	UNIT單位							
			A	B	C	D	E	F	G	H
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	Tower 3 第3座	43/F 43樓	150, 200	150	150	150	150	150	150	150
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）（毫米）			3500, 3875, 3900	3500	3500	3500	3500	3500	3500	3500

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (This does not apply to the residential properties in the Phase because the design of the Phase does not involve reducing thickness of structural walls of residential properties on the upper floors.)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用於期數內的住宅物業，因期數的設計並不牽涉住宅物業的較高樓層的結構牆的厚度遞減。）

Notes:

1. The dimensions in the floor plan are all structural dimensions in millimetre.

2. Please refer to Page 20 of this sales brochure for glossary of the terms and abbreviations shown in the floor plan.

3. 4/F, 14/F, 24/F, 34/F and 44/F are omitted in Tower 3.

附註：

1. 平面圖所列之尺寸為以毫米標示之建築結構尺寸。

2. 樓面平面圖中顯示之名詞及簡稱請參閱本售樓說明書第20頁。

3. 第3座不設4樓、14樓、24樓、34樓及44樓。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

TOWER 3
45/F FLOOR PLAN
第3座
45樓平面圖



- ③ ACOUSTIC WINDOW (NOISE MITIGATION MEASURES)
減音窗(噪音緩解措施)
- ④ ACOUSTIC BALCONY (NOISE MITIGATION MEASURES)
減音露台(噪音緩解措施)

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

	TOWER 座	FLOOR 樓層	UNIT單位							
			A	B	C	D	E	F	G	H
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	Tower 3 第3座	45/F 45樓	150	150	150	150	150	150	150	150
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）（毫米）			3500, 3550, 3800, 3850, 3875, 3900	3500, 3550, 3800, 3850, 3900	3500, 3850	3500, 3800, 3850	3500, 3800, 3850	3500, 3800	3500, 3800, 3900	3500, 3550, 3850, 3900

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (This does not apply to the residential properties in the Phase because the design of the Phase does not involve reducing thickness of structural walls of residential properties on the upper floors.)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用於期數內的住宅物業，因期數的設計並不牽涉住宅物業的較高樓層的結構牆的厚度遞減。）

Notes:

1. The dimensions in the floor plan are all structural dimensions in millimetre.

2. Please refer to Page 20 of this sales brochure for glossary of the terms and abbreviations shown in the floor plan.

3. 4/F, 14/F, 24/F, 34/F and 44/F are omitted in Tower 3.

附註：

1. 平面圖所列之尺寸為以毫米標示之建築結構尺寸。


2. 樓面平面圖中顯示之名詞及簡稱請參閱本售樓說明書第20頁。

3. 第3座不設4樓、14樓、24樓、34樓及44樓。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

TOWER 3
ROOF FLOOR PLAN
第3座
天台平面圖

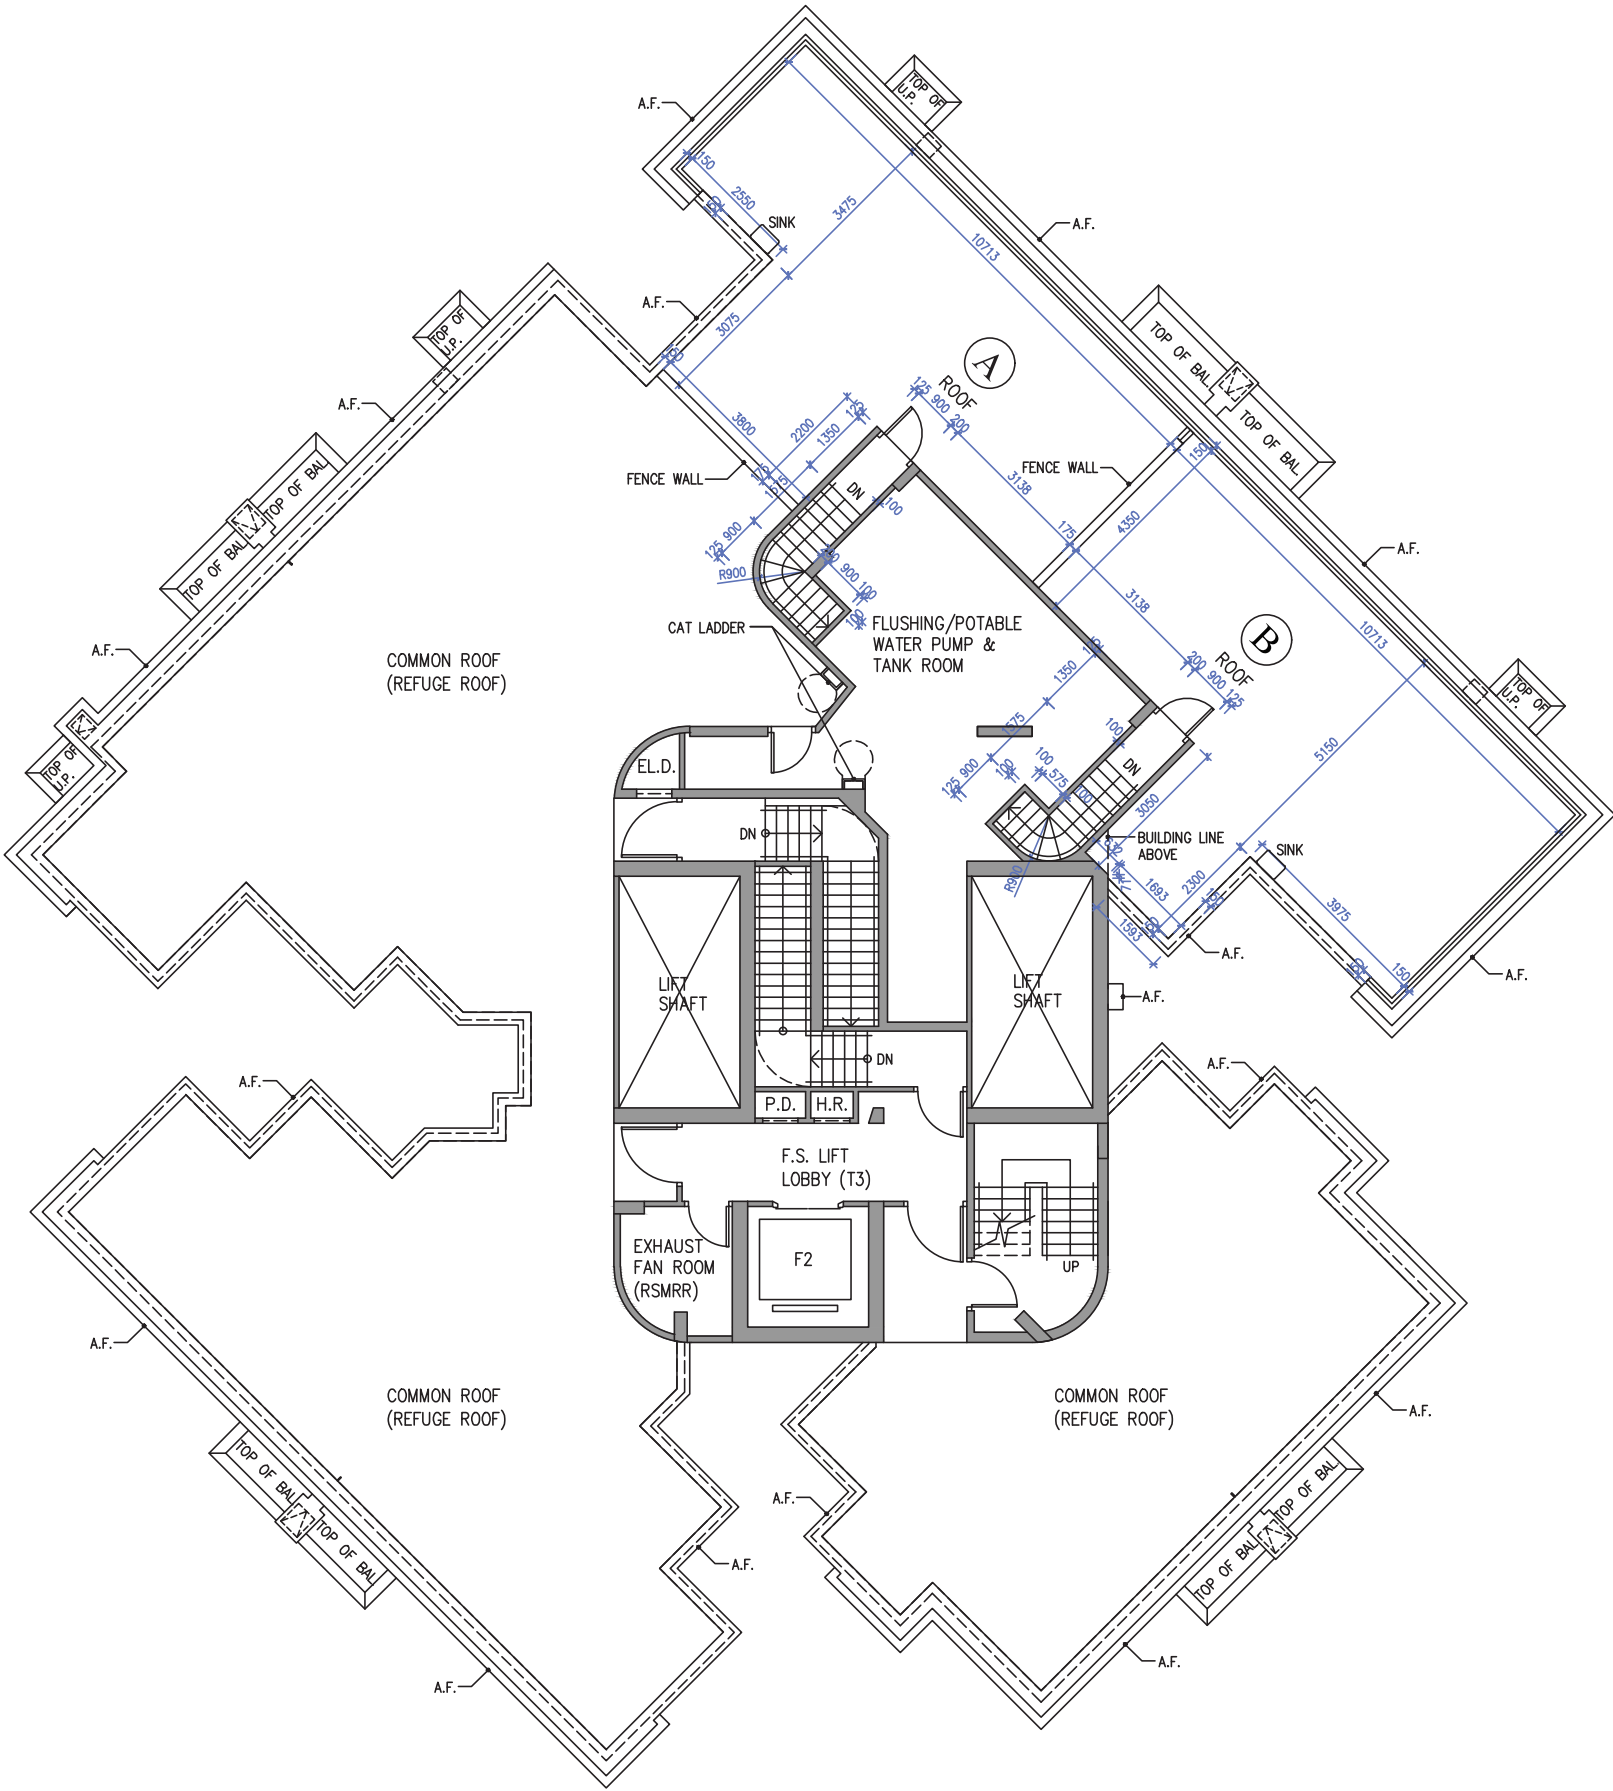

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

	TOWER 座	FLOOR 樓層	UNIT單位							
			A	B	C	D	E	F	G	H
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥）的厚度（毫米）	Tower 3 第3座	Roof 天台	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用
The floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (mm) 每個住宅物業的層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）（毫米）			Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用	Not applicable 不適用

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (This does not apply to the residential properties in the Phase because the design of the Phase does not involve reducing thickness of structural walls of residential properties on the upper floors.)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用於期數內的住宅物業，因期數的設計並不牽涉住宅物業的較高樓層的結構牆的厚度遞減。）

Notes:

1. The dimensions in the floor plan are all structural dimensions in millimetre.

2. Please refer to Page 20 of this sales brochure for glossary of the terms and abbreviations shown in the floor plan.

3. 4/F, 14/F, 24/F, 34/F and 44/F are omitted in Tower 3.

附註：

1. 平面圖所列之尺寸為以毫米標示之建築結構尺寸。

2. 樓面平面圖中顯示之名詞及簡稱請參閱本售樓說明書第20頁。

3. 第3座不設4樓、14樓、24樓、34樓及44樓。